


CA.05 GGSM

Ø 10-14-20

. Spring loaded vacuum cup arm (Non-rotational shaft)

. Greifarm gefedert verdrehgesichert

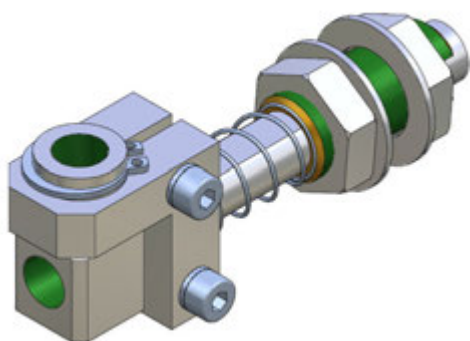

Threaded tube
Gewindeschaft

Table / Tabelle


H = Spring deflection
Federweg

F = Spring force
Federkraft

Remarks / Anmerkungen:


Brass material
Messing

Non rotational
Verdrehgesichert

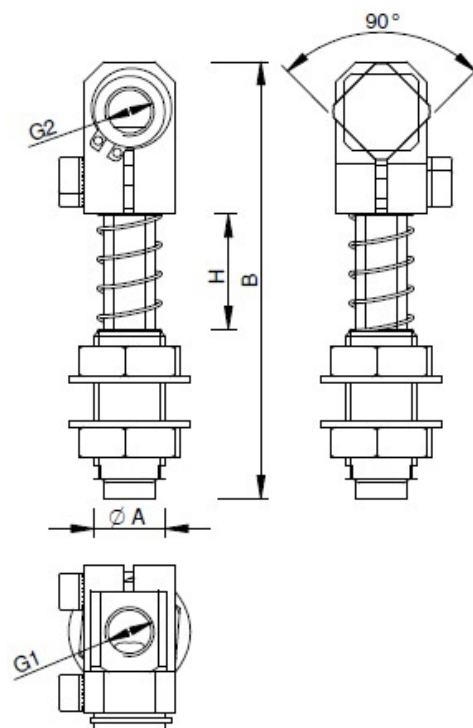

Article no.	A	B	G1	G2	H	F(N)	Weight
CA.GGSM100515	M10X1	69	M5	M5	10	6	42g
CA.GGSM100520		79			20		45g
CA.GGSM100530		98			30		50g
CA.GGSM141815	M14X1.5	86	G 1/8	G 1/8	17	20.7	85 g
CA.GGSM141840		110			38	23.3	96 g
CA.GGSM201425	M20X1.5	116	G 1/4		25	18.4	222 g
CA.GGSM201445		141			48	16.7	242 g

Fixed screw
Feste schraube



Adjustable screw
Verstellbare schraube

Application example / Anwendungsbeispiel

