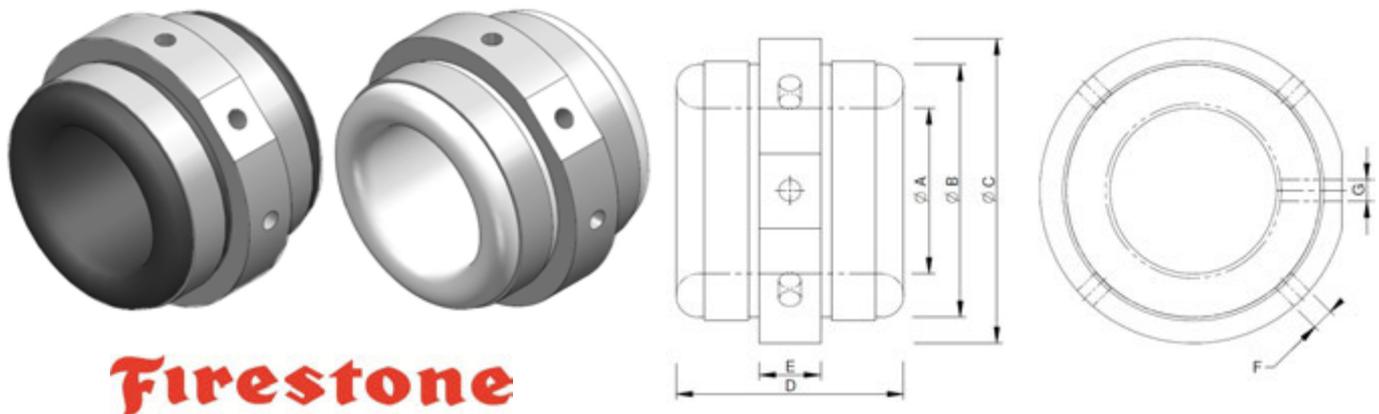


CA.09.13


. Airgripper

FIRESTONE

. Pneumatische Außengreifer


Firestone

Article no.	FIRESTONE Code	Material	Working range	Maximum restricted pressure allowed	A	B	C	D	E	F	G	Weight
CA.09.13.05.15 CA.09.13.05.15.S	WP1-M58-5001 WP1-M58-5005	Neoprene (N) Silicone (S)	5-15 mm	1.5 bar 1.0 bar	19	33	40	36	10	M5	M5	60 g
CA.09.13.10.25 CA.09.13.10.25.S	WP1-M58-5002 WP1-M58-5006	Neoprene (N) Silicone (S)	10-25 mm	1.5 bar 1.0 bar	27	48	60	48	13	M6	M6	145 g
CA.09.13.15.35 CA.09.13.15.35.S	WP1-M58-5003 WP1-M58-5007	Neoprene (N) Silicone (S)	15-35 mm	1.5 bar 1.0 bar	37	58	70	52	14	M5	M6	210 g
CA.09.13.20.45 CA.09.13.20.45.S	WP1-M58-5004 WP1-M58-5008	Neoprene (N) Silicone (S)	20-45 mm	1.5 bar 1.0 bar	48	69	80	56	15	M8	G 1/8	285 g

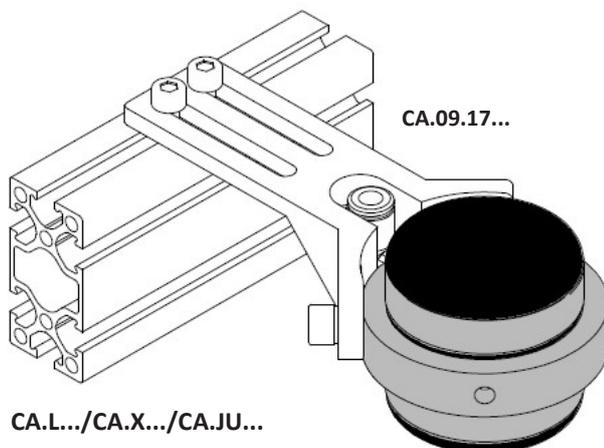Application example / Anwendungsbeispiel

Remarks / Anmerkungen:

 Temperature resistance / *Temperaturbeständigkeit*

Neoprene (N)

-18° to 52° C

 Silicone / *Silikon* (S)

-30° to 160° C

 Leaving few marks / *Abdruckarm*

(N) ☺

(S) ☹

CA.09.13

FIRESTONE

. Airgripper

. Pneumatische Außengreifer

Air Pressure 0 MPa

Air Pressure 0.05 MPa

Air Pressure 0.1 MPa



CA.09.17

. Mounting Brackets

. Klemmstücke

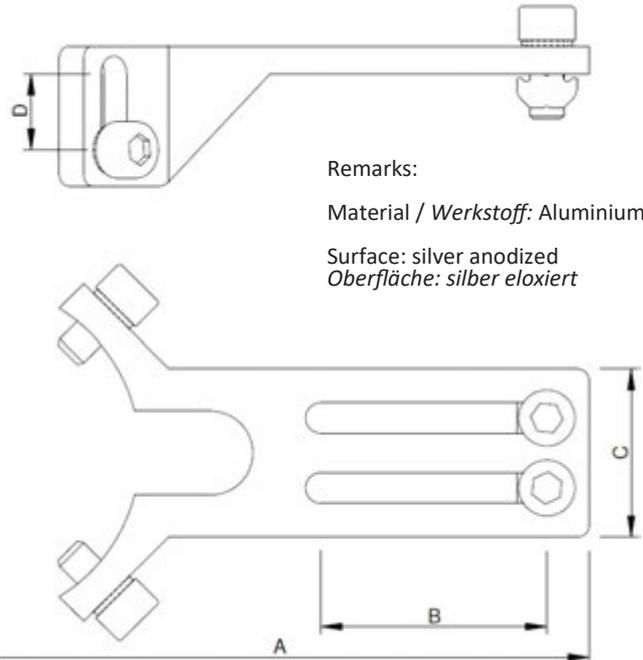
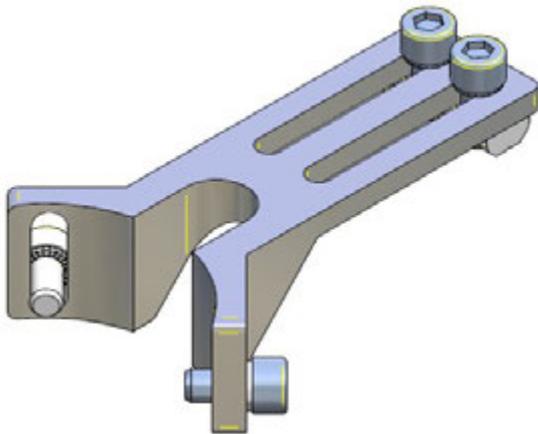


Table / Tabelle

M = Suitable for CA.09.13...
Passend für CA.09.13...

M1 = Suitable for PROFILE...
Passend für PROFILE...

Article no.	M	M1	A	B	C	D	Weight
CA.09.17.0515.X	CA.09.13.05.15	CA.X../ CA.JU..	100	40	25	15	31 g
CA.09.17.1025.X	CA.09.13.10.25		110		30		46 g
CA.09.17.1535.X	CA.09.13.15.35		115		40		57 g
CA.09.17.2045.X	CA.09.13.20.45		120		69 g		