

## CA.05.02

Ø 10-14-20

. Spring loaded vacuum cup arm (Non-rotational shaft)

. Greifarm gefedert verdrehgesichert

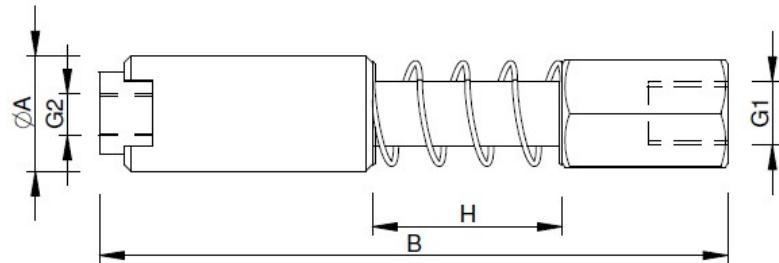
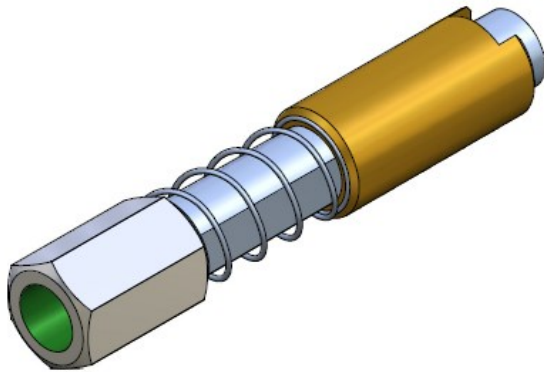


Table / Tabelle

H = Spring deflection  
FederwegF = Spring force  
Federkraft

Remarks / Anmerkungen:

Brass material  
MessingNon rotational  
Verdrehgesichert

| Article no.     | A  | B   | G1    | G2    | H    | F(N) | Weight |
|-----------------|----|-----|-------|-------|------|------|--------|
| CA.05.02.002    | 20 | 125 | G 1/4 | G 1/8 | 48   | 16.6 | 73 g   |
| CA.05.02.004    |    | 100 |       |       | 25   | 18.4 | 135 g  |
| CA.05.02.009    | 10 | 69  | M5    | M5    | 20   | 3.4  | 26 g   |
| CA.05.02.009.6N |    |     |       |       |      | 6    |        |
| CA.05.02.010    |    | 59  |       |       | 10   | 4.8  | 23 g   |
| CA.05.02.010.6N |    |     |       |       |      | 6    |        |
| CA.05.02.011    | 14 | 100 | G 1/8 | 38    | 23.3 | 63 g |        |
| CA.05.02.012    |    | 76  |       | 17    | 20.7 | 52 g |        |

Application example / Anwendungsbeispiel

CA.L.../CA.X.../CA.JU...

CA.WSL...

