

АЛЬТЕРНАТИВНЫЕ КОДЫ:




Z67; R53; E1575

ОПИСАНИЕ:

DIN 471, используется в качестве стопорящего элемента, предотвращает образование люфтов

ПРИМЕР ЗАКАЗА:

RB1575*d1

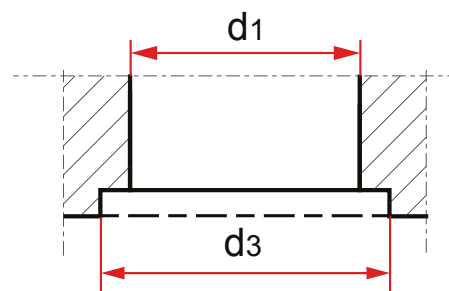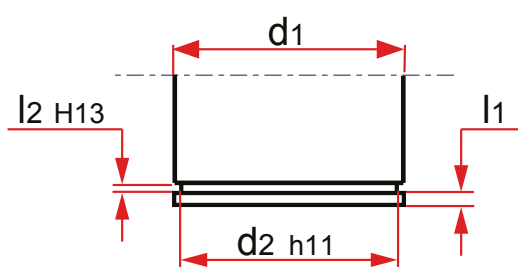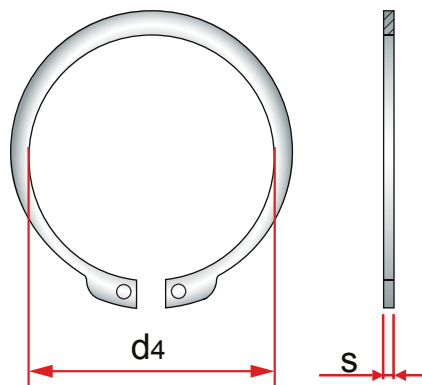

l1 min.	l2	s	d2	d3	d4	d1		
0,6	1,1	1,0	8,6	16,0	8,4	9,0		
			9,6	17,6	9,3	10,0		
11,5			19,6	11,0	12,0			
13,4			22,0	12,9	14,0			
14,3			22,6	13,8	15,0			
15,2			23,8	14,7	16,0			
1,5			1,3	1,2	17,0	26,8	16,5	18,0
					19,0	29,0	18,5	20,0
					21,0	30,8	20,5	22,0
22,9					33,2	22,2	24,0	
1,7	23,9	34,2			23,2	25,0		
	24,9	35,5			24,2	26,0		
2,1	1,6	1,5	28,6	40,5	27,9	30,0		
2,6			30,3	43,0	29,6	32,0		
3,8	1,85	1,75	36,0	50,2	35,2	38,0		
			37,5	52,2	36,5	40,0		
			39,5	55,7	38,5	42,0		
			45,5	62,6	44,5	48,0		
4,5	2,15	2,0	47,0	64,5	45,8	50,0		
			49,0	66,0	47,8	52,0		
			52,0	70,2	50,8	55,0		
			55,0	73,6	53,8	58,0		
			62,0	81,4	60,8	65,0		
	2,65	2,5	67,0	87,0	65,5	70,0		