

МАТЕРИАЛ: 1.2210 закалённый


ТВЁРДОСТЬ СТЕРЖНЯ: 60+/-2 HRC

ТВЁРДОСТЬ ГОЛОВКИ: 45+/-5 HRC

ОПИСАНИЕ: Толкатель плоский с 4 скруглёнными углами, идеально подходит для извлечения в зоне рёбер/краев, которые имеют решающее значения в проектировании.

РАБОЧАЯ ТЕМПЕРАТУРА: ДО 220 С

ПРИМЕР ЗАКАЗА: LAR-4-s *b *l

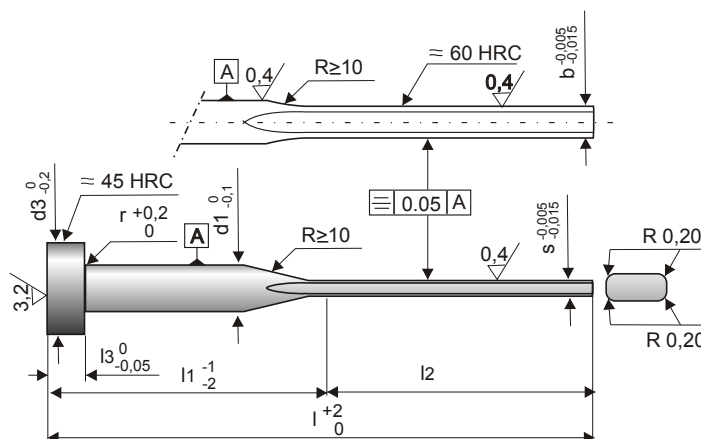

r	d1	d3	l1	l2	l3	s	b	l	r	d1	d3	l1	l2	l3	s	b	l
0,3	3,0	6,0	40	40	3,0	0,5	2,8	80	0,3	4,2	8,0	100	100	3,0	0,8	3,8	200
			50	50				125				125	250				
			60	65				125				33	63				
			80	80				160				40	80				
			40	40				80				50	100				
			50	50				100				60	125				
			60	65				125				80	160				
			80	80				160				100	200				
			40	40				80				125	155				
			50	50				100				160	200				
			60	65				125				40	80				
			80	80				160				50	100				
0,3	4,2	8,0	40	40	3,0	0,6	3,8	80	0,3	5,0	10,0	40	40	3,0	1,0	4,5	80
			50	50				50				50	100				
			60	65				125				60	125				
			80	80				160				80	160				
			40	40				80				100	200				
			50	50				100				125	250				
			60	65				125				160	315				
			80	80				160				40	80				
			40	40				80				50	100				
			50	50				100				60	125				
			60	65				125				80	160				
			80	80				160				100	200				
0,3	4,2	8,0	40	40	3,0	0,8	3,8	80	0,3	5,0	10,0	40	40	3,0	1,2	4,5	80
			50	50				50				50	100				
			60	65				125				60	125				
			80	80				160				80	160				
			30	33				63				100	200				
			40	40				80				125	250				
			50	50				100				160	315				
			60	65				125				40	80				
			80	80				160				50	100				
			40	40				80				60	125				
			50	50				100				80	160				
			60	65				125				100	200				
80	80	160	125	250													
100	100	200	160	315													

МАТЕРИАЛ: 1.2210 закалённый


ТВЁРДОСТЬ СТЕРЖНЯ: 60+/-2 HRC

ТВЁРДОСТЬ ГОЛОВКИ: 45+/-5 HRC

ОПИСАНИЕ: Толкатель плоский с 4 скруглёнными углами, идеально подходит для извлечения в зоне рёбер/краев, которые имеют решающее значение в проектировании.

РАБОЧАЯ ТЕМПЕРАТУРА: ДО 220 С

ПРИМЕР ЗАКАЗА: LAR-4-s *b *l

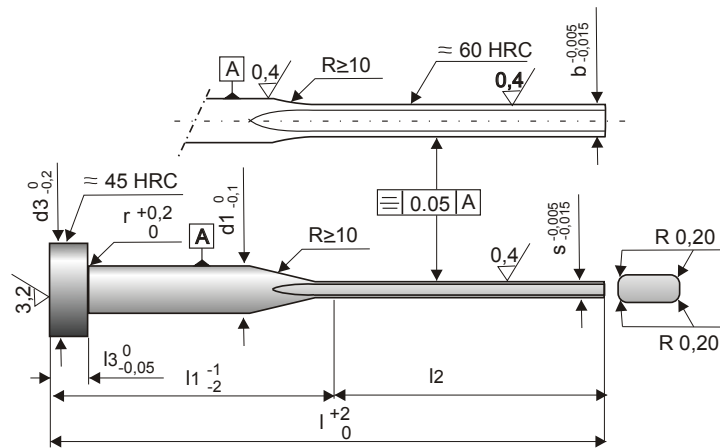

r	d1	d3	l1	l2	l3	s	b	l				
0,3	5,0	10,0	50	50	3,0	1,5	4,5	100				
			60	65				125				
			80	80				160				
			100	100				200				
			125	125				250				
			160	155				315				
			200	200				400				
0,5	6,0	12,0	40	40	5,0	1,0	5,5	80				
			50	50				100				
			60	65				125				
			80	80				160				
			100	100				200				
			125	125				250				
			160	155				315				
			200	200		400						
			250	250		500						
			315	315		600						
			400	400		800						
			1,2	6,0		12,0	40	40	5,0	1,2	5,5	80
							50	50				100
							60	65				125
80	80	160										
100	100	200										
125	125	250										
160	155	315										
200	200	400										
0,5	6,0	12,0	40	40	5,0	2,0	5,5	80				
			50	50				100				
			60	65				125				
			80	80				160				
			100	100				200				
			125	125				250				
			160	155				315				
			200	200		400						
			250	250		500						
			315	315		600						
			400	400		800						
			1,5	6,0		12,0	40	40	5,0	1,5	5,5	80
							50	50				100
							60	65				125
80	80	160										
100	100	200										
125	125	250										
160	155	315										
200	200	400										
0,5	6,0	12,0	40	40	5,0	2,0	5,5	80				
			50	50				100				
			60	65				125				
			80	80				160				
			100	100				200				
			125	125				250				
			160	155				315				
			200	200		400						
			250	250		500						
			315	315		600						
			400	400		800						
			2,0	6,0		12,0	40	40	5,0	2,0	5,5	80
							50	50				100
							60	65				125
80	80	160										
100	100	200										
125	125	250										
160	155	315										
200	200	400										
0,8	12,0	18,0	40	40	7,0	2,0	11,5	80				
			50	50				100				
			60	65				125				
			80	80				160				
			100	100				200				
			125	125				250				
			160	155				315				
			200	200		400						
			250	250		500						
			315	315		600						
			400	400		800						
			2,5	12,0		18,0	40	40	7,0	2,5	11,5	80
							50	50				100
							60	65				125
80	80	160										
100	100	200										
125	125	250										
160	155	315										
200	200	400										