



CT 300 V2


Low Profile

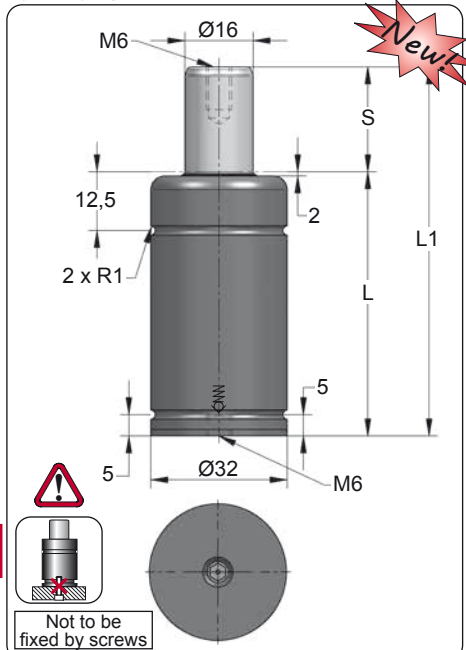

ORDER	S (mm)	L1 ±0,25 (mm)	L (mm)	Kg.
CT 300 007 V2	7	51	44	0.21
CT 300 010 V2	10	57	47	0.22
CT 300 013 V2	13	63	50	0.23
CT 300 016 V2	16	69	53	0.24
CT 300 019 V2	19	75	56	0.25
CT 300 025 V2	25	87	62	0.27
CT 300 032 V2	32	101	69	0.29
CT 300 038 V2	38	113	75	0.31
CT 300 050 V2	50	137	87	0.35
CT 300 063 V2	63	163	100	0.40
CT 300 075 V2	75	187	112	0.44
CT 300 080 V2	80	197	117	0.46
CT 300 100 V2	100	237	137	0.52
CT 300 125 V2	125	287	162	0.61

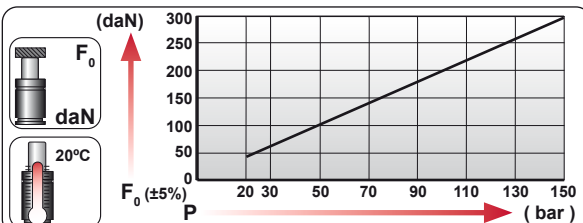


CODE	Pressure (bar)	Pressure (psi)	F ₀ (daN)	F ₁ (daN)
CT 300 050 V2	150	2175	300	445
-----	---	---	---	---

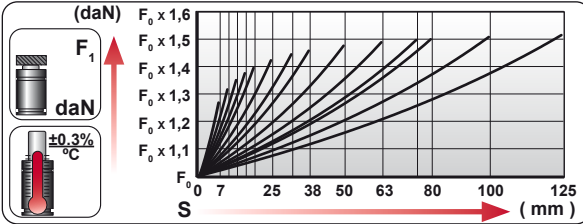

ENG ORDER
 DEU BESTELLUNG
 FRA COMMANDE
 ITA ORDINE
 ESP PEDIDO
 POR PEDIDO

F₀ daN
 S mm

CT 300 50
 CT 300 050 V2

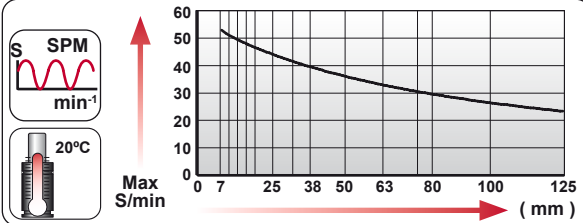


N₂ S_{max} < 90% V_{max} 1,6 m/s Pmin Pmax (20°C) Tmin Tmax [Image]

N ₂	S _{max} < 90%	V _{max} 1,6 m/s	bar psi	bar psi	°C °F	°C °F	°C °F	X
			20 290	150 2175	0 32	80 176		


CT 300 V2 MOUNTS

Low Profile


A14-032

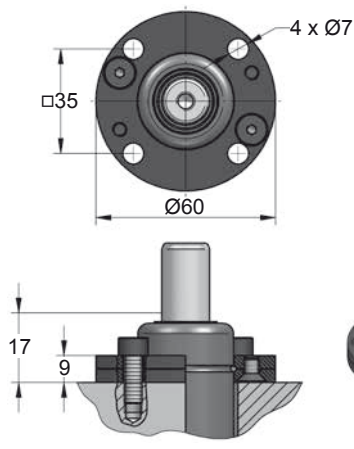


A34-032

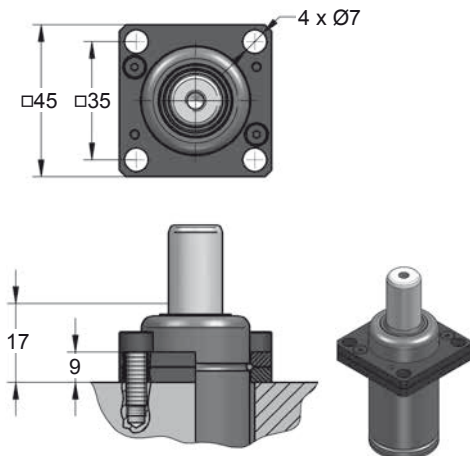



A44-032

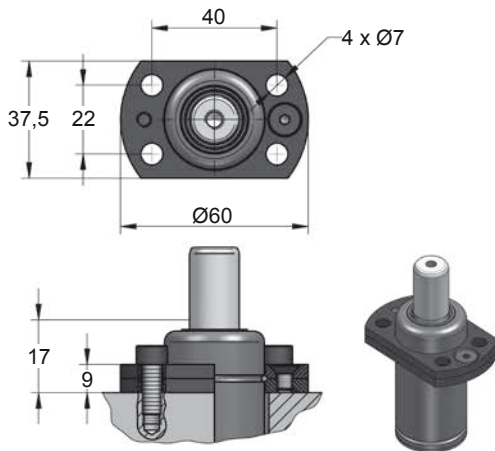

Single base thread





Gas springs with only a single base thread should not be mounted by screws.



SEAL
KIT S-XXXXXXX



CARTRIDGE
KIT C-XXXXXXX



CODE	CT 300 050 V2	X	A14-032	06 CG 2-Q
ENG ORDER	GAS SPRING	REPAIR KIT	FLANGE	CHARGING ADAPTER
DEU BESTELLUNG	GASDRUCKFEDER	ERSATZTEILSATZ	FLANSCH	LADEADAPTER
FRA COMMANDE	RESSORT À GAZ	KIT DE RÉPARATION	BRIDE	RACCORD DE CHARGE
ITA ORDINE	CILINDRO AD AZOTO	KIT DI MANUTENZIONE	FLANGE	ADATTATORE DI CARICO
ESP PEDIDO	RESORTE DE GAS	KIT DE REPARACION	BRIDA	ADAPTADOR DE CARGA
POR PEDIDO	CILINDRO DE GAS	KIT DE MANUTENÇÃO	FLANGE	ADAPTADOR DE CARGA